
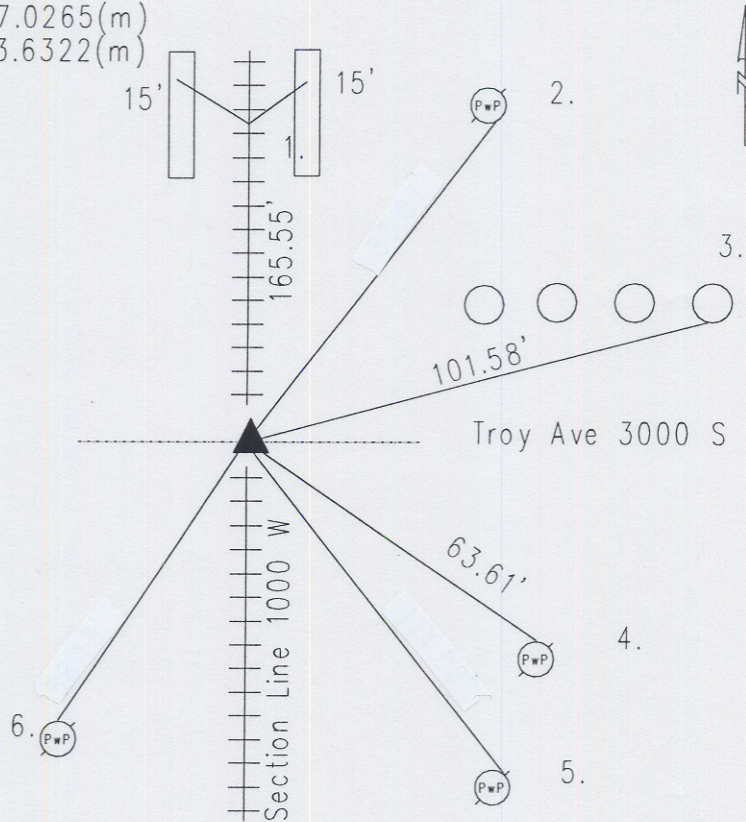


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 26 TOWNSHIP 15 RANGE 3
DATE: 3-21-02 9-14-07
PARTY CHIEF: --Kiste-- Wilcoxen
CREW: _____
TYPE OF MARKER: Copperweld Fd
METHOD OF ESTABLISHMENT: County: 9-16-97

IN. S.P.C. E ZONE NAD '83
NAME: 15032601
N: 496797.0265(m)
E: 56203.6322(m)

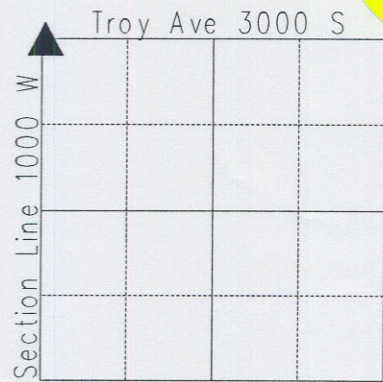

Original post set 1820 by Laughlin with witness: 40" ash N 5 E 40 links;
4" dogwood S 43 W 12 links per Marion County Atlas pg. 6. Fatout 11-11-1880
called no stone or witness per Perry Township Legal Survey Book pg. 47.
Prout 1970 referenced but did not call out type of marker. Miller 9-15-75
called a PK nail. Wilcoxen 4-9-92 called same. 9-16-97 called a copperweld
was set in position by Kiste. Re-tied 3-21-02 by Kiste.
15032601

REF.	DISTANCE	DESCRIPTION
1.	165.55'	Due N. to PK nail in railroad tie center of trestle
2.	82.96'	Road nail SE PwP#68-634 A 70"up
3.	101.58'	Road nail in top of 10th post E 12"up
4.	63.61'	Road nail N PwP#21-634 B 28"up
5.	114.01'	Road nail E PwP#64-634 B 60"up
6.	58.05'	Road nail N PwP#107-634 B 50"up